
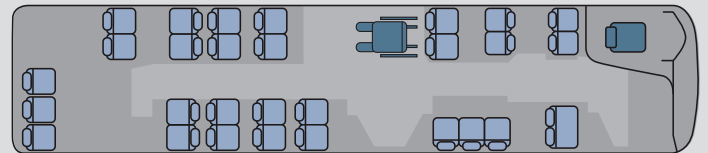
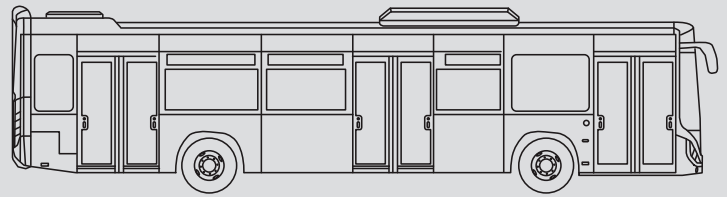


Otokar

THE RATIONAL CHOICE

KENT C

URBAN TRANSPORT

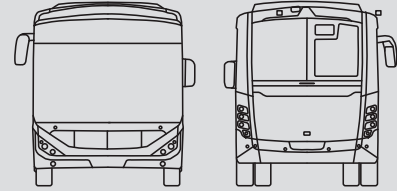

Length
12 000 mm

Up to
94
passengers



ASR

EBS

Layout: 25 + 70 + 1

Optional: 25 + 62 + 1 wch + 1 (For handicapped versions with toilet)
Other layout available on request



DIMENSIONS

Length	12 000 mm
Width	2 540 mm
Height	3 245 mm
Wheelbase	4 670 mm
Front Track Width	2 151 mm
Rear Track Width	1 874 mm
Front Overhang	2 700 mm
Rear Overhang	3 400 mm
Interior Height	2 215 / 1 415 mm

WEIGHTS

Front Axle Capacity	6 500 kg
Rear Axle Capacity	11 500 kg
Gross Vehicle Weight	17 955 kg
Fuel Tank Capacity	295 l
Ad-blue tank capacity	31 l

ENGINE

Manufacturer / Type	Cummins ISB6.7E6300B
Number of Cylinders	6
Engine Volume	6 700 cc
Max. Power	221 kW (300 HP) / 2100 d.d.
Max. Torque	1 200 Nm / 1 200 - 1 600 d.d.
Engine Location	Rear

TRANSMISSION

Type	Automatic Transmission (VOITH DIWA)
Speed	4 Forward, 1 Reverse

TURNING CIRCLE

Wall to Wall	9 175 mm
--------------	----------



KENT C

STANDARD AND OPTIONAL EQUIPMENTS

SUSPENSION

Front	2 air bellows, 2 hydraulic shock absorbers, 1 levelling sensor
Rear	4 air bellows, 4 hydraulic shock absorbers, 2 levelling sensors

DIFFERENTIAL

Manufacturer	ZF
Diff. Ratio	6.2

BRAKES

Front and Rear	Full-air self adjusting, dual circuit disc brakes
----------------	---------------------------------------------------

STEERING SYSTEM

Hydraulic

DOORS

Front	Double flaps inward swinging
Middle	Double flaps inward swinging
Rear	Double flaps inward swinging

ELECTRICAL SYSTEM

Batteries	2 x 12 V 225 Ah
Alternator	2 x 120 A

TYRES

275 / 70 R22,5

Double tyres at rear

STRUCTURE (BODY)

Body	Monocoque
------	-----------

POWERTRAIN

ABS, ASR, EBS
ECAS III
Kneeling
Automatic engine oil fill-up system
Automatic chassis lubrication (ACL)

AC

A/C (39kW) with digital controller
Additional heater
Two rear heaters
Front box

WINDOWS

Single glazed side windows
Heated front door window
Heated driver's window
Heated windscreen
2 pcs at right, 2 pcs at left was ist das type windows

Optional

Double glazed side windows

ACCESSIBILITY

Exterior handicapped button
Wheelchair area
Four priority seats
Handicapped ramp
Maternal-child seat
Stainless steel holding bars

SEATING

Non-reclining passenger seats
Air assisted driver's seat with seatbelt and armrest

SAFETY

DRL
Heated & digital controllable coach type (horn) rear view mirror
Driver cabin door with transparent panel
Fire extinguishers
First aid kit
STOP buttons with Braille alphabet
Illuminated door buttons
LED interior lighting
Safety system for doors
Fire alert and extinguishing system for engine compartment

Reverse gear buzzer

Rear park sensors

Manual circuit breaker near batteries

Surveillance cameras at middle and rear doors

Rear view camera and 7" monitor

PASSENGER INFO

Digital signboards at front, rear and side
Announcement system both inside and outside
Microphone
2x25W Amplificator
6 speakers (inside)
Speaker (outside)
19" LCD monitors (2 at front cabin, 1 at back cabin)

DRIVER COMFORT

Adjustable steering column
Electrically controlled sunvisor
Manual sunvisor at driver side
Locker
Coat Hanger

BODY

Fog lamps (front and rear)
Bus stop system
High riding

Optional

Metallic Colour

OTHER FEATURES

Battery main switch
Digital tachograph
Fuel consumption indicator
2 Roof hatches

Otokar

www.otokar.com